



Update grandMA3 Xport Nodes



Important:

We recommend formatting with every update.
Whenever formatting, the IP address will be reset back to default (DHCP).



Important:

- The folders EFI, ma, and other data included have to be directly accessible on the flash drive and must not be located in an extra folder.
- The USB flash drive's data system has to be FAT32.




Important:

- grandMA3 onPC 2Port Node 2k outputs 1,024 parameters
- grandMA3 onPC 4Port 4k and 8Port Node 4k outputs 2,048 parameters when run in Mode2.

Requirement:


- Download the grandMA3 software on www.malighting.com
- Extract the entire data from the zip.file and copy it onto a USB flash drive.
 1. Insert the USB flash drive.
 2. Power up the grandMA3 xPort Node.
 3. Update notification appears.

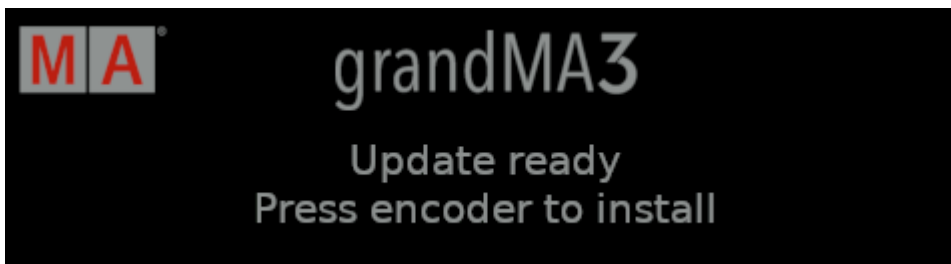

Update notification

4. Press the rotary knob.


- In case of a corrupted installer package, this notification appears:

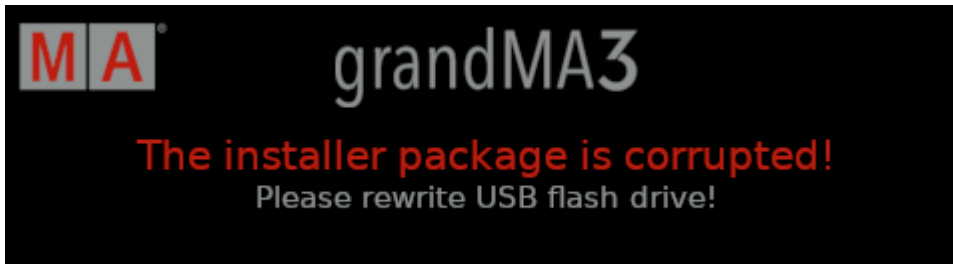

Corrupted installer package


- To troubleshoot, rewrite the USB flash drive.

5. Formatting notification appears showing a progress bar.

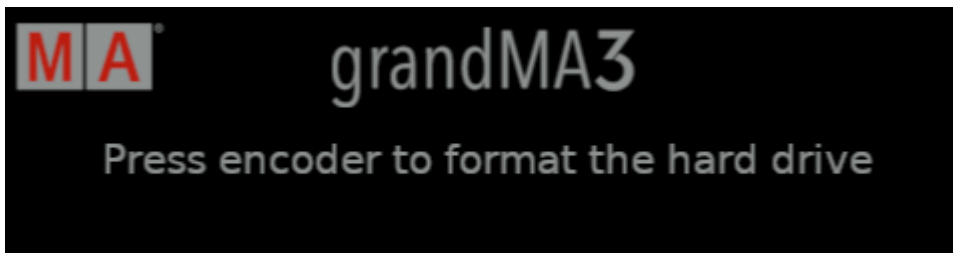

Format the hard drive


6. Press the rotary knob before the progress bar completes.
7. The grandMA3 xPort Node starts to update.

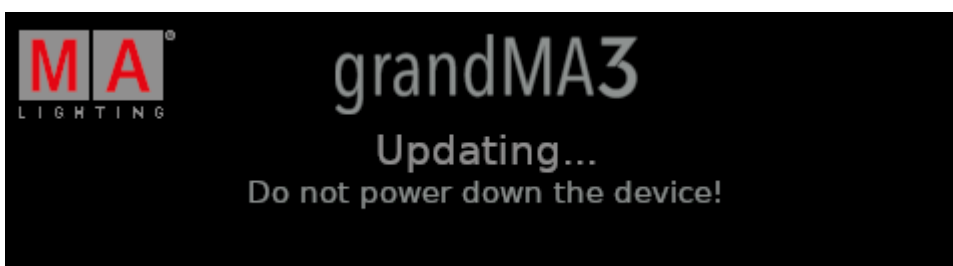

grandMA3 xPort Node is updating


-
- In case of an update error, contact the technical support.

For the contact details see the footer of this website.

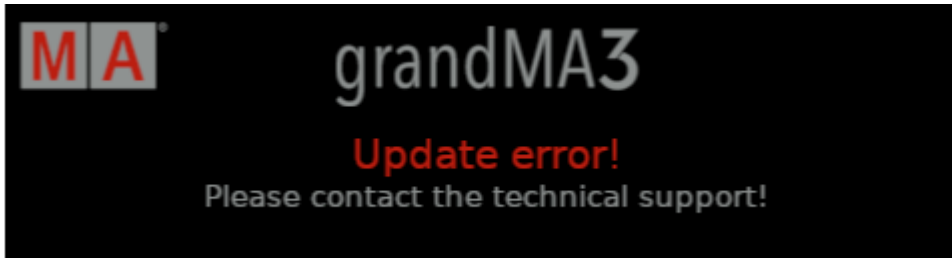

Update error

-
8. Once the update has been completed, a notification appears.

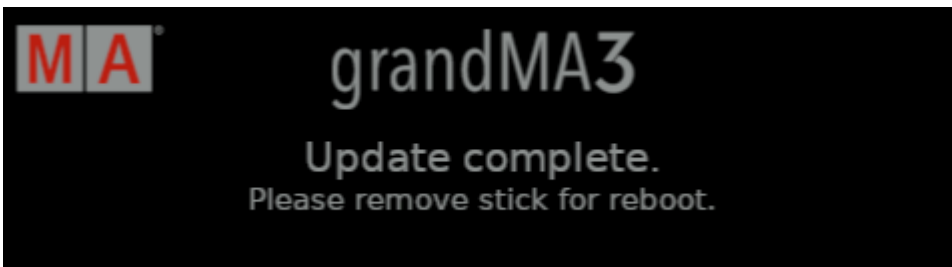

Updated completed

9. Remove the USB flash drive.
10. The display goes white and starts to reboot.

The grandMA3 xPort Node is updated.