

Change Modes

Change from Mode2 to grandMA3 on Consoles


To change from Mode2 to grandMA3:

1. Restart the console by using the **Restart Keyword**. A pop-up opens:



Restart pop-up

3. Confirm the pop-up. The Mode2 application closes and the console restarts.
4. The Mode Selection pop-up appears. Tap **3**.

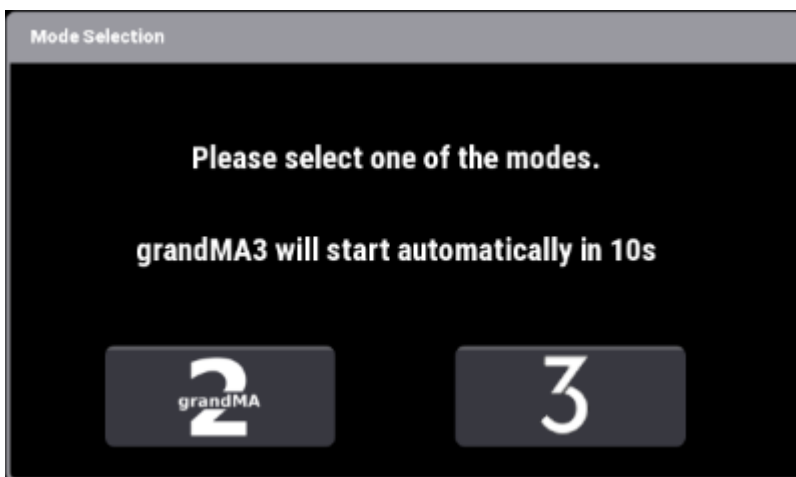

Mode Selection Dialog

SwitchTo grandMA3 Software Keyword

Requirements: A grandMA3 station running in Mode2.

- To switch from Mode2 to grandMA3, use the **SwitchTo grandMA3 Software** keyword described in the grandMA3 User Manual.

Reboot Processing Unit from Mode2 to grandMA3

To change the application for the processing unit:

1. Tap **Reboot** on the left side of the processing unit main screen. A pop-up opens.



Processing Unit

2. Tap **Yes**. The processing unit reboots.



Pop-up

3. Continue as described in **Change from Mode2 to grandMA3 on Consoles**.

xPort Node from Mode2 to grandMA3

- To change the xPort Node from Mode2 to grandMA3, follow these instructions:



Mode2 screen:

4Port-Node-0006			30
Version 3.9.50.0			
IP 172.16.11.221			
MANET 2			Session 1
A	B	C	D
OUT	OUT	OUT	OUT
1	2	3	4

- To switch to grandMA3, press and hold the rotary knob. The display cycles through the following screens:

4Port-Node-0006			30
Select Mode :			
NONE	MANET 2	ARTNET 3	
A	B	C	D
OUT	OUT	OUT	OUT
1	2	3	4

4Port-Node-0006			30
Version 3.9.50.0			
Serial 1375000000-900006			
Node Type 4Port			
A	B	C	D
OUT	OUT	OUT	OUT
1	2	3	4

Release the Button and press the Button short again will ACTIVATE the IDENTIFY MODE !			
---	--	--	--

Release the Button and press the Button short again will RESET and keep the settings !			
--	--	--	--

Release the Button and press the Button short again will RESTORE to factory defaults !			
--	--	--	--

- Release the rotary knob at the following screen:



**SWITCH TO GMA3 MODE!!!
Release the Button and press the
Button short again.**

- Press the rotary knob to confirm.

The xPort Node reboots into grandMA3 mode.

For more information about changing from grandMA3 mode to Mode2, read the topic **Control other MA devices** in the **grandMA3 User Manual**.