



List Key

The key **List** is located in the command area on the left of the key **Store**.

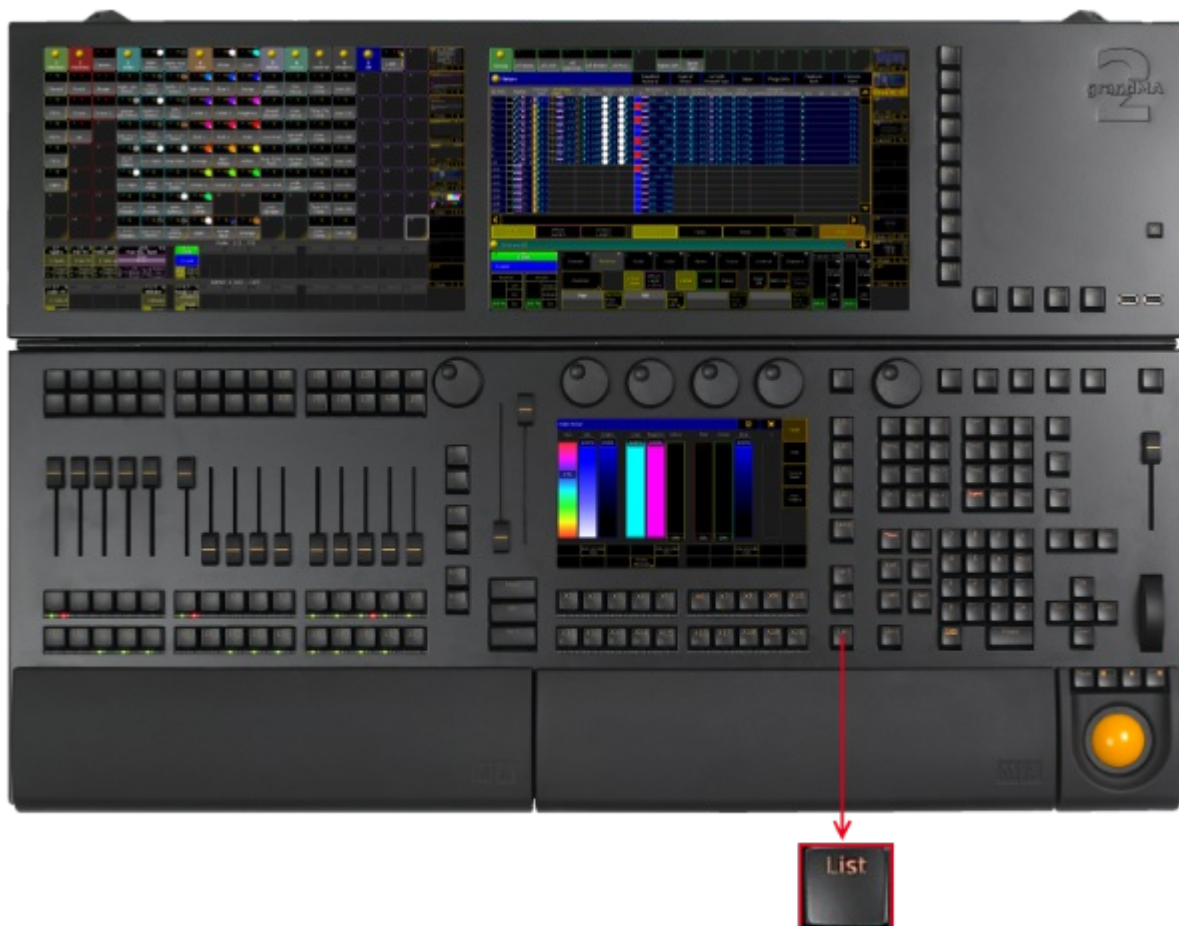


Location key List

- Pressing **List** displays the X-Key labels for the executor buttons 201-220 on the current button page.

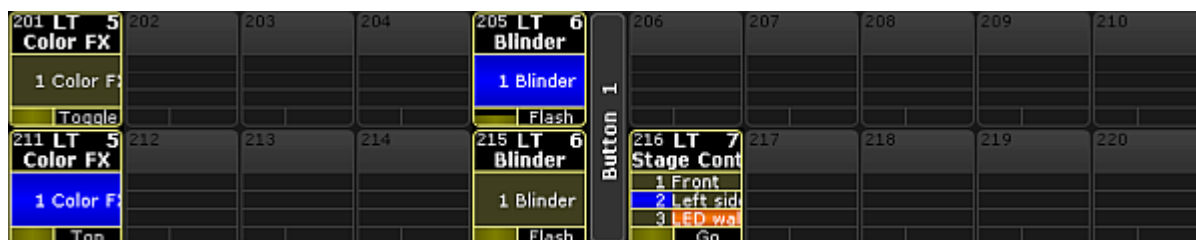

Button page on screen 1

- Pressing and holding  + **List** enters the List keyword into the command line.


 [Channel]> List

Open Temporary Pools


The following short cuts open the temporary pool on screen 2 respectively (except for grandMA2 onPC without MA onPC wing).

Temporary pools can be identified by the red background color between the objects.

- Pressing and holding **List** + **Channel** opens the temporary channel page pool.

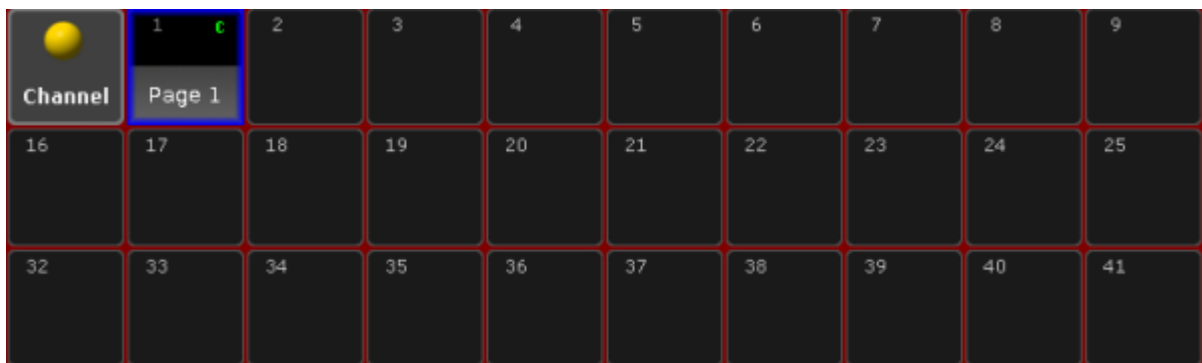

Temporary Channel Pool

 [time] : Macro: Menu ChannelPage



- Pressing and holding **List** + **Group** opens the temporary group pool.



Temporary Group Pool

[time] : Macro: Menu Group

- Pressing and holding **List** + **Sequence** opens the temporary sequence pool.



Temporary Sequence Pool

[time] : Macro: Menu Sequence




- Pressing and holding **List** + **Page** opens the temporary executor page pool.



Temporary Executor Page Pool




- Pressing and holding **List** + **Macro** opens the temporary macro pool.

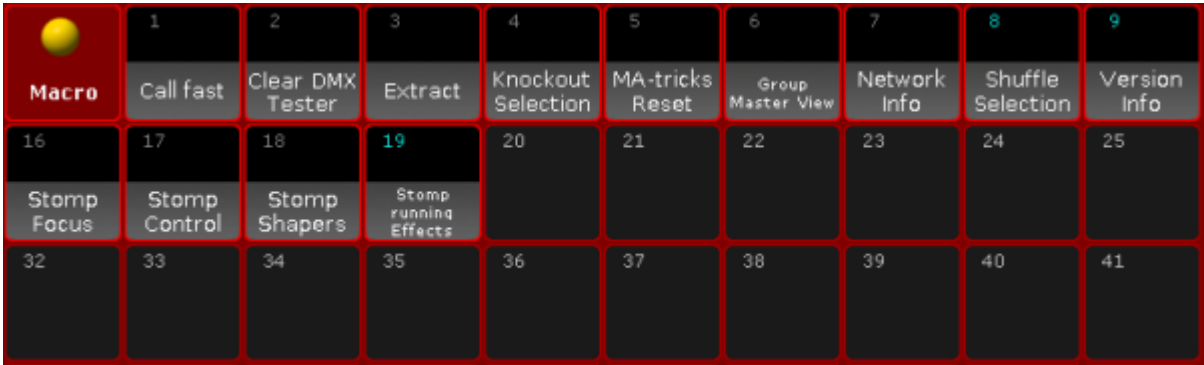

Temporary Macro Pool




- Pressing and holding **List** + **Preset** opens the temporary preset pool for the selected preset type in the preset control bar.

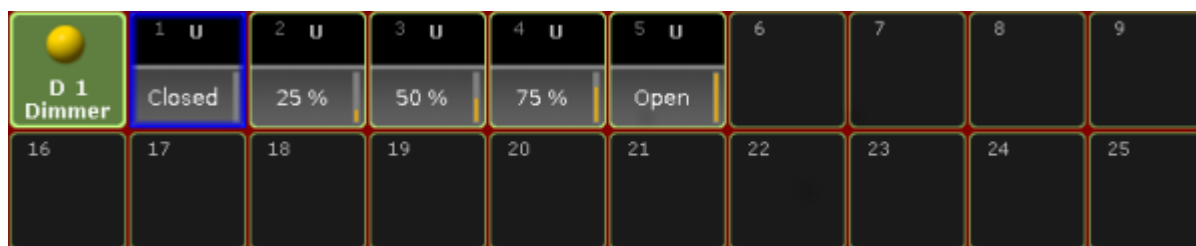

Temporary Dimmer Preset Pool

[time] : Macro: Menu Preset

- Pressing and holding **List** + **View** opens the temporary view pool.

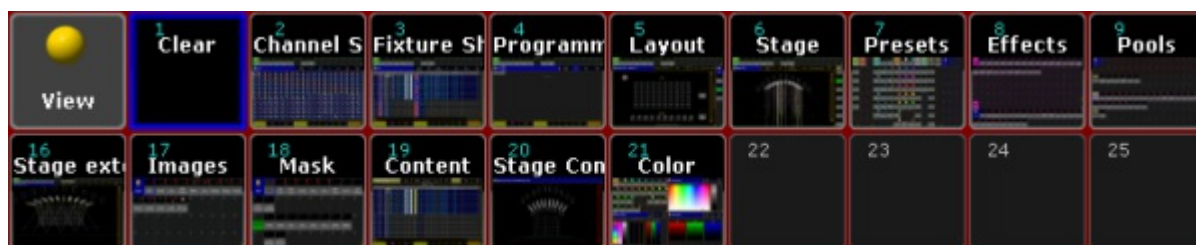


Temporary View Pool

[time] : Macro: Menu View



- Pressing and holding **List** + **Effect** opens the temporary effect pool.

| | | | | | | | | | |
|---|------------------------------|-----------------------------|---------------------------------|--------------------------|--------------------------------|--------------------------------|------------------------|---------------------------------|-----------------------|
|  Effect | 1 110 Dimmer Sin | 2 AT Dimmer Chase | 3 AT Dimmer PWM | 4 AT Dimmer Random | 5 AT Dimmer Even/Odd | 6 AT Shutter PWM | 7 AT RGB Rainbow | 8 AT =RGB Rainbow | 9 AT RGB Chase |
| 16 AT Color 3 Ramp | 17 AT Dim/P/T Ballyhoo | 18 AT Dim/Tilt Flyout | 19 RT Tilt Sin. | 20 RT Pan Sin. | 21 RT Tilt Sin Pan stomp | 22 RT Pan Sin Tilt stomp | 23 RT P/T Circle | 24 RT P/T Wave | 25 RT P/T Cross |
| 32 AS RGB Viol Yade | 33 AS RGB Viol Orange | 34 AS RGB Congo Yello | 35 100 AS RGB Red Blue | 36 | 37 | 38 | 39 | 40 10 AS Spot Red Blue | 41 |

Temporary Effect Pool

[time] : Macro: Menu Effect