



Update the Software

Every grandMA3 device is delivered with the latest version of the grandMA3 software.

All devices in a network with software versions higher than 1.0 can communicate with each other.


This is to give you information on how to update or downdate the grandMA3 software if needed.

To check which version your device is currently running, use the **Version keyword** in the command line (does not work with PUs and Nodes).

Check for Updates and Download the Latest Version


To check if there is a new grandMA3 software update:

1. Go to www.malighting.com, click **Downloads**.

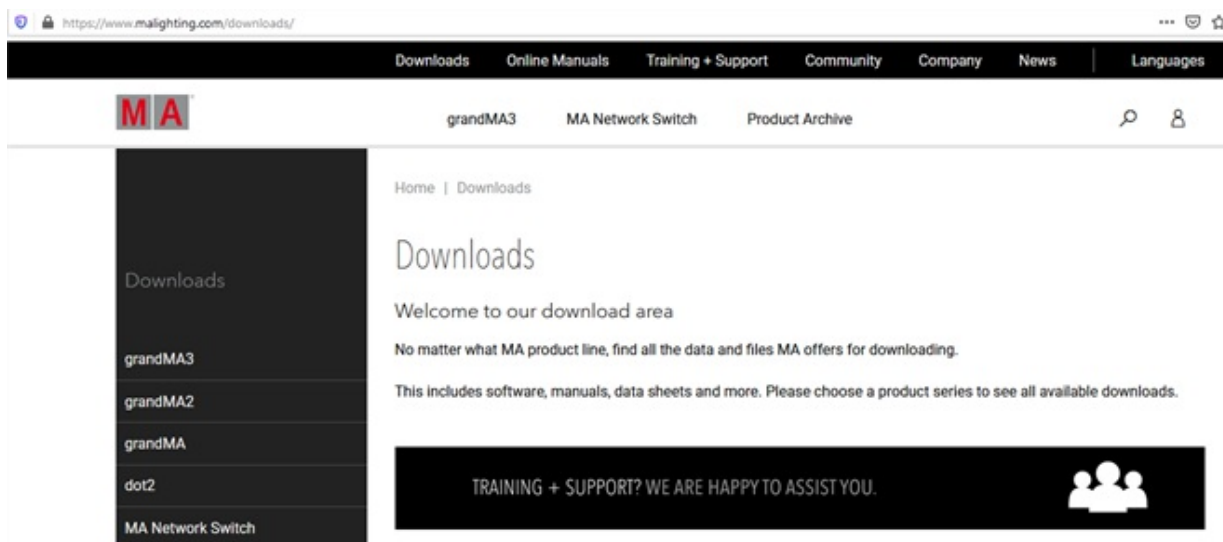


Website [malighting.com](https://www.malighting.com) Downloads

2. Click **grandMA3** in the bar on the left.

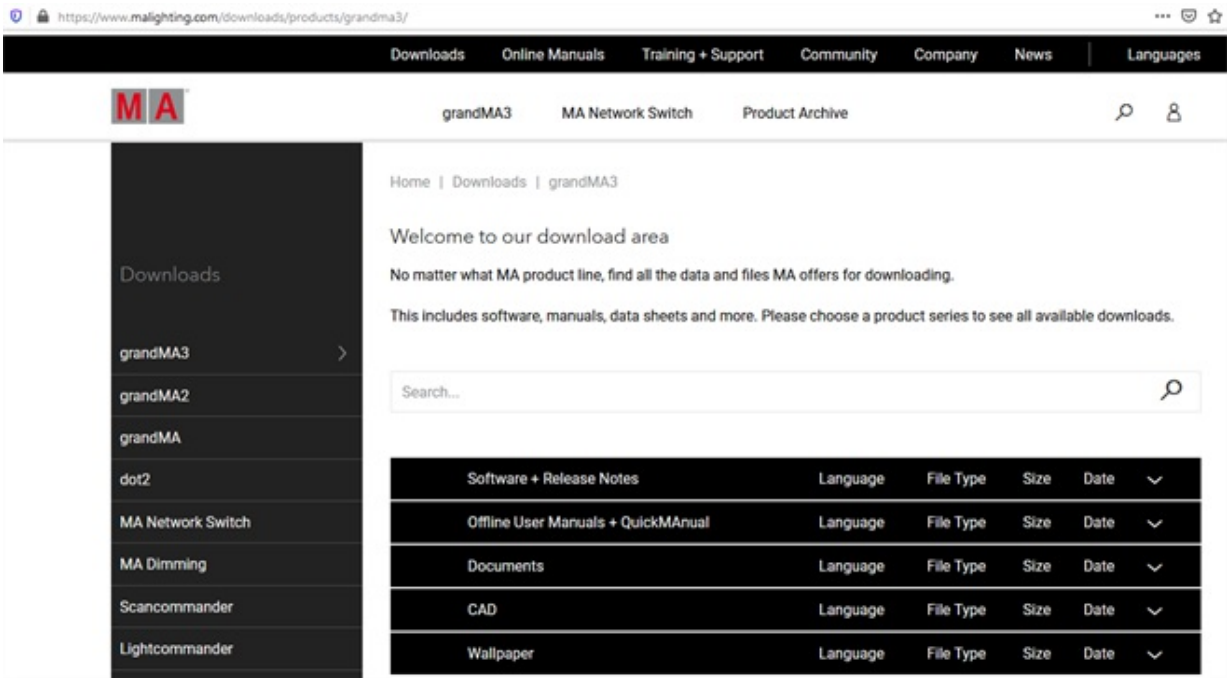

grandMA3 section

3. Click **Software + Release Notes** to find the latest software version.

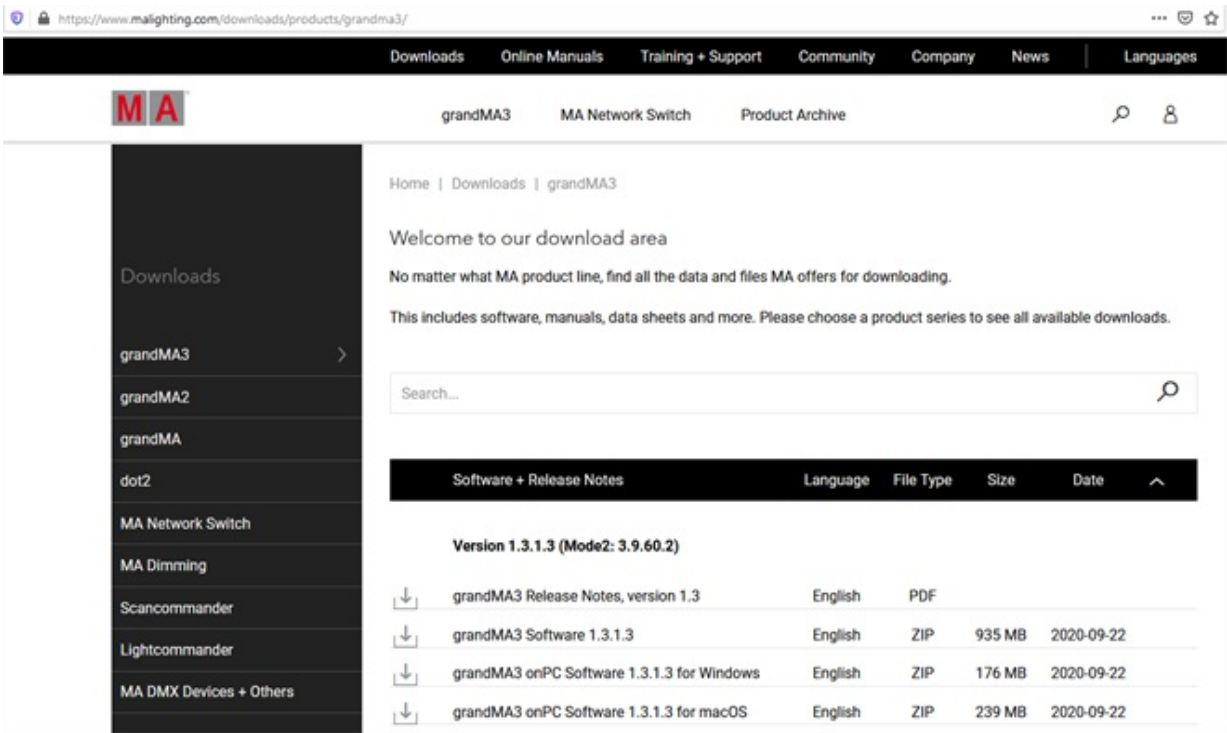

grandMA3 Software section

4. Click the current version to download the desired installation package.



Important:

Every grandMA3 device except with Windows or macOS operating system uses the same software and needs the main installation package grandMA3 Software.

To update the grandMA3 software on a PC or laptop, choose the installation package grandMA3 onPC Software for Windows or grandMA3 Software for macOS.


For network updates via PC or laptop, you also need to download the installation package grandMA3 onPC Software for the connected grandMA3 devices.

The download process starts.

Download an Older Version


To downdate a grandMA3 device to an older software version, e.g. in a permanent installation, follow these steps:

Go to www.malighting.com, click **Downloads**.

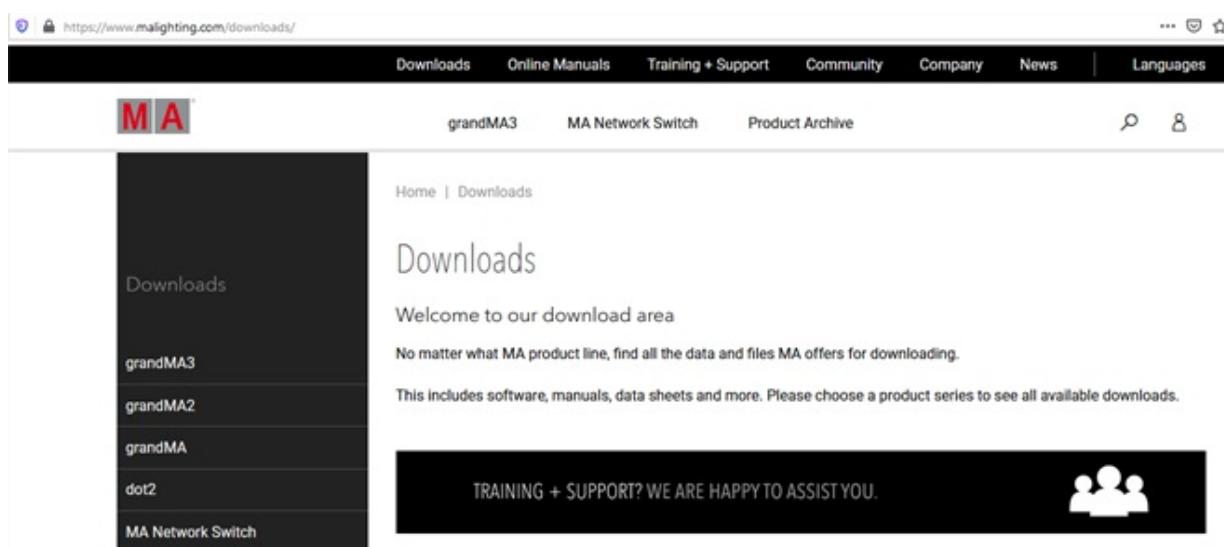


Website [malighting.com](https://www.malighting.com) Downloads

2. Click **grandMA3** in the bar on the left.

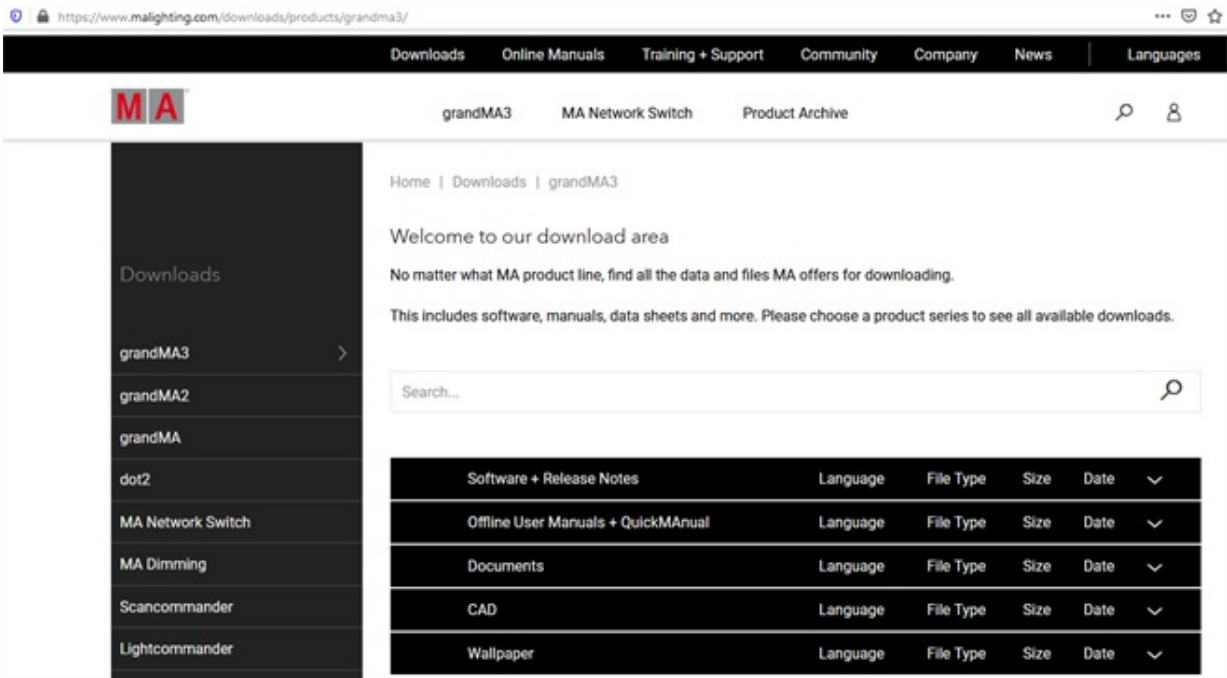

grandMA3 section

3. Click **Software + Release Notes**.

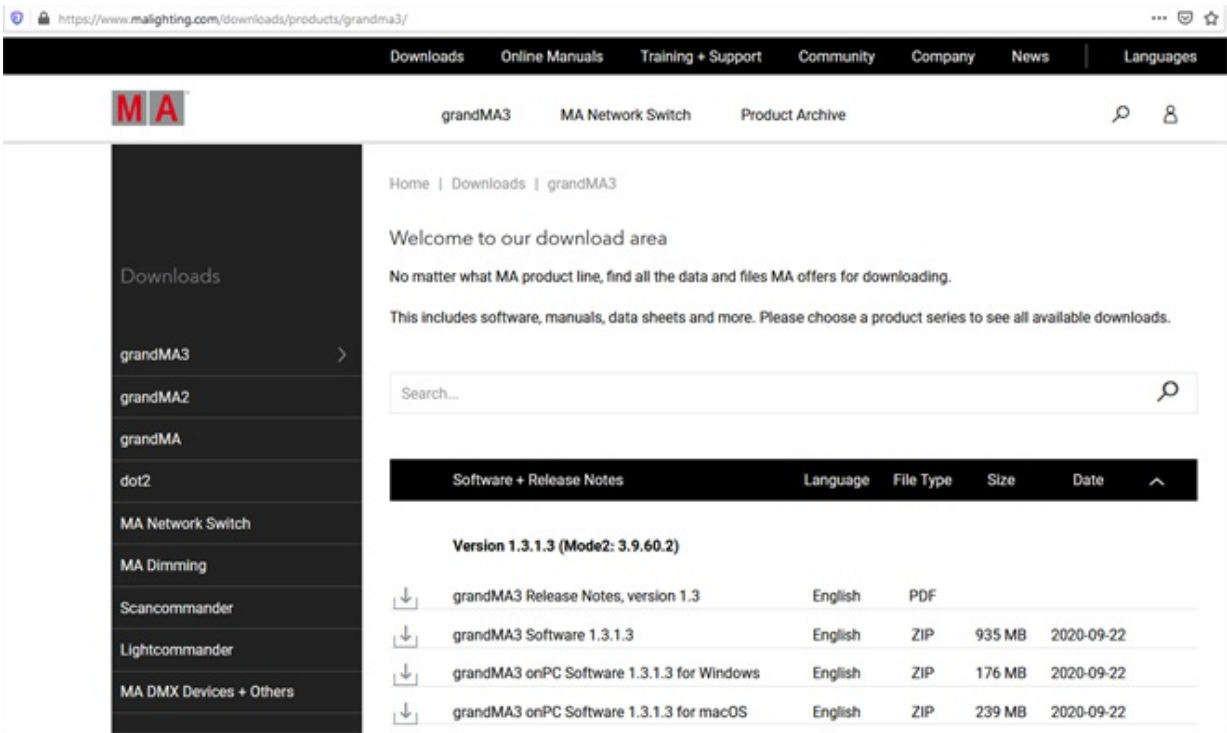

grandMA3 Software section

4. Scroll down and click **Archive** to find older software versions.



https://www.malighting.com/downloads/products/grandma3/

Downloads Online Manuals Training + Support Community Company News Languages

grandMA3 MA Network Switch Product Archive


grandMA3
grandMA2
grandMA
dot2
MA Network Switch
MA Dimming
Scancommander
Lightcommander
MA DMX Devices + Others

Search...

Software + Release Notes	Language	File Type	Size	Date
Version 1.3.1.3 (Mode2: 3.9.60.2)				
grandMA3 Release Notes, version 1.3	English	PDF		
grandMA3 Software 1.3.1.3	English	ZIP	935 MB	2020-09-22
grandMA3 onPC Software 1.3.1.3 for Windows	English	ZIP	176 MB	2020-09-22
grandMA3 onPC Software 1.3.1.3 for macOS	English	ZIP	239 MB	2020-09-22
Archive				
Version 1.2.0.2 (Mode2: 3.9.51.2)				
Version 1.1.4.2 (Mode2: 3.9.0.3)				
Version 1.1.3.2 (Mode2: 3.9.0.1)				
Version 1.0.0.3 (Mode2: 3.8.0.0)				
Version 0.92.1.3 (Mode2: 3.7.0.3)				
Version 0.92.1.1 (Mode2: 3.7.0.1)				
Version 0.92.1.5 (Mode2: 3.7.0.5)				
Version 0.91.0.1 (Mode2: 3.6.1.1)				
Version 0.9.3.6 (Mode2: 3.5.0.6)				

grandMA3 Software archive

5. To open the folder, click the desired version, e.g. Version 1.2.0.2.

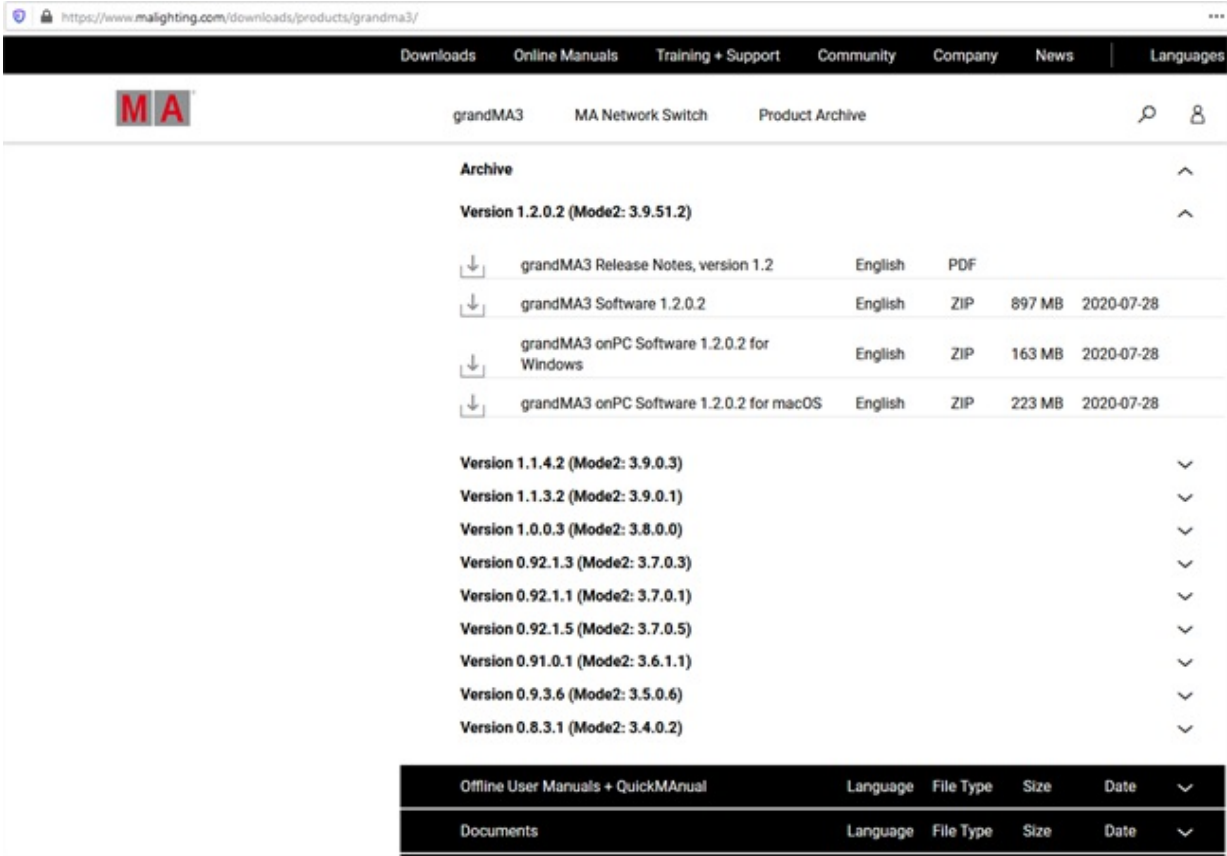

grandMA3 Software archive versions

- 6. Click the desired installer version to download the required installation package.

The download process starts.

Store the Installation Packages

Unlike in grandMA2, all installation packages for grandMA3 software are included in one zip-file.

Extract the entire data from the installation package zip-file.

The folders EFI, ma, and other data included are extracted.

For Windows systems, copy the files from the ma folder into the directory

C:\ProgramData\MALightingTechnology\installation_packages.

For macOS systems, copy the files from the ma folder into the directory ~/MALightingTechnology/installation_packages.

To properly update the console, follow all the onscreen instructions that appear during the update.